


## Courbe caractéristique Ventilateur type CHVN 500

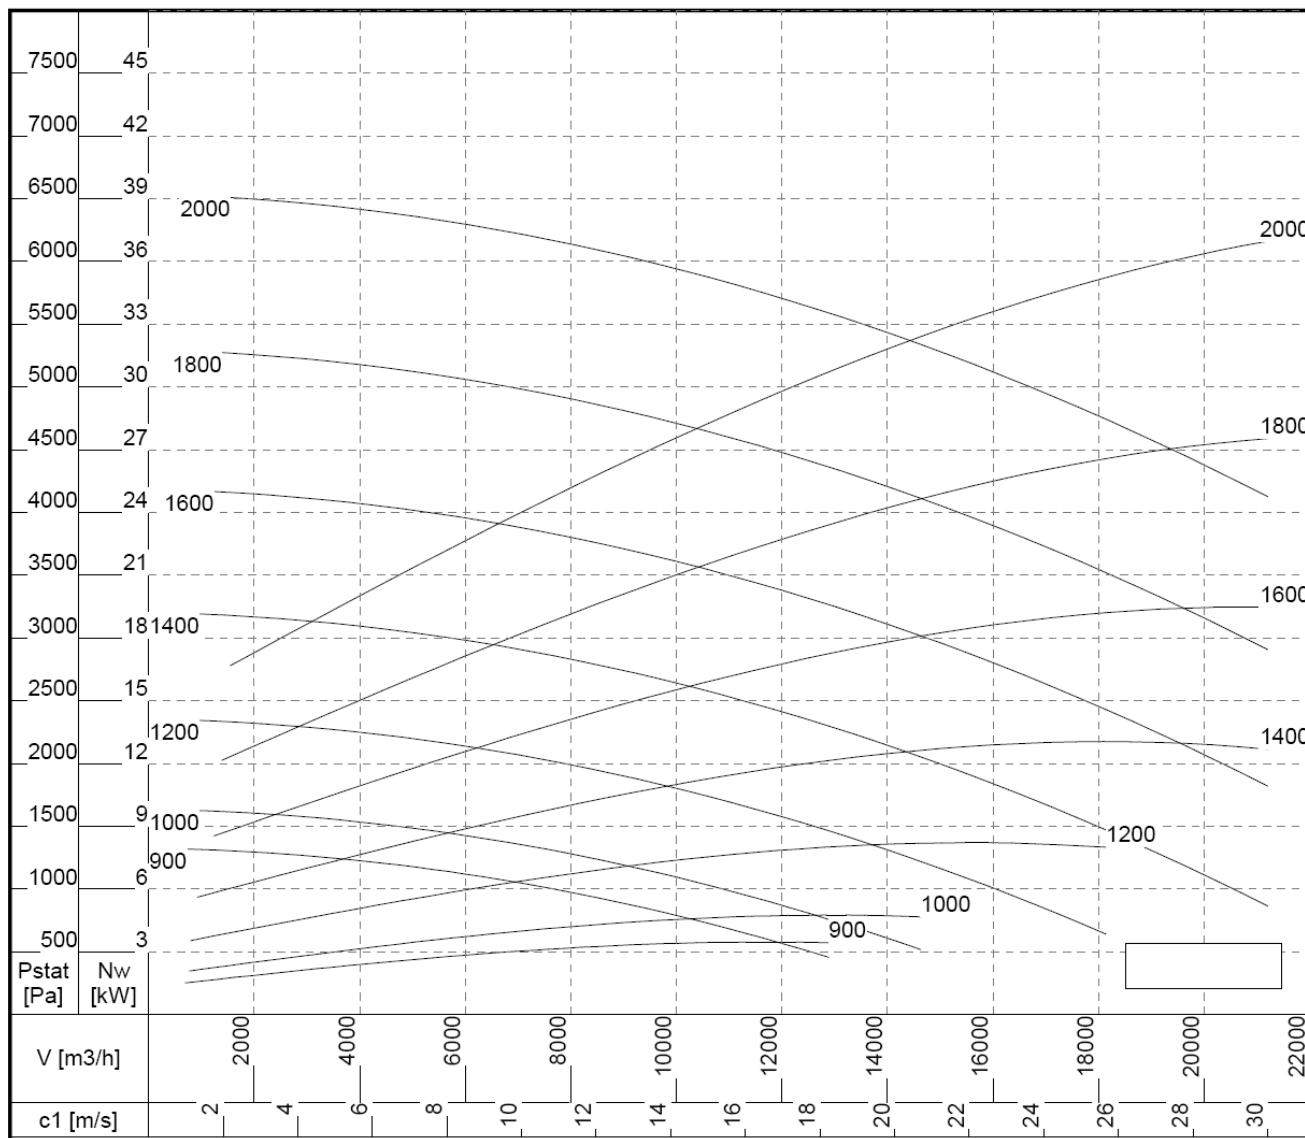

Puissance acoustique  $L_{wA}$  dB(A); Niveau de pression acoustique  $L_{pA} = L_{wA} - 7$  dB(A) Dist. 1m  
ISO 5136.2

| n      | $L_{wA}$<br>dB(A) | Hz |     |     |     |      |      |      |      |
|--------|-------------------|----|-----|-----|-----|------|------|------|------|
|        |                   | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| min -1 |                   |    |     |     |     |      |      |      |      |
| 900    | 79                | 65 | 70  | 75  | 72  | 70   | 59   | 53   | 46   |
| 1000   | 81                | 67 | 72  | 77  | 74  | 72   | 61   | 55   | 48   |
| 1200   | 85                | 71 | 76  | 81  | 78  | 76   | 65   | 59   | 52   |
| 1400   | 88                | 74 | 79  | 84  | 81  | 79   | 68   | 62   | 55   |
| 1600   | 90                | 76 | 81  | 86  | 83  | 81   | 70   | 64   | 57   |
| 1800   | 93                | 79 | 84  | 89  | 86  | 84   | 73   | 67   | 60   |
| 2000   | 95                | 81 | 86  | 91  | 88  | 86   | 75   | 69   | 62   |