


## Courbe caractéristique Ventilateur type CMV 800

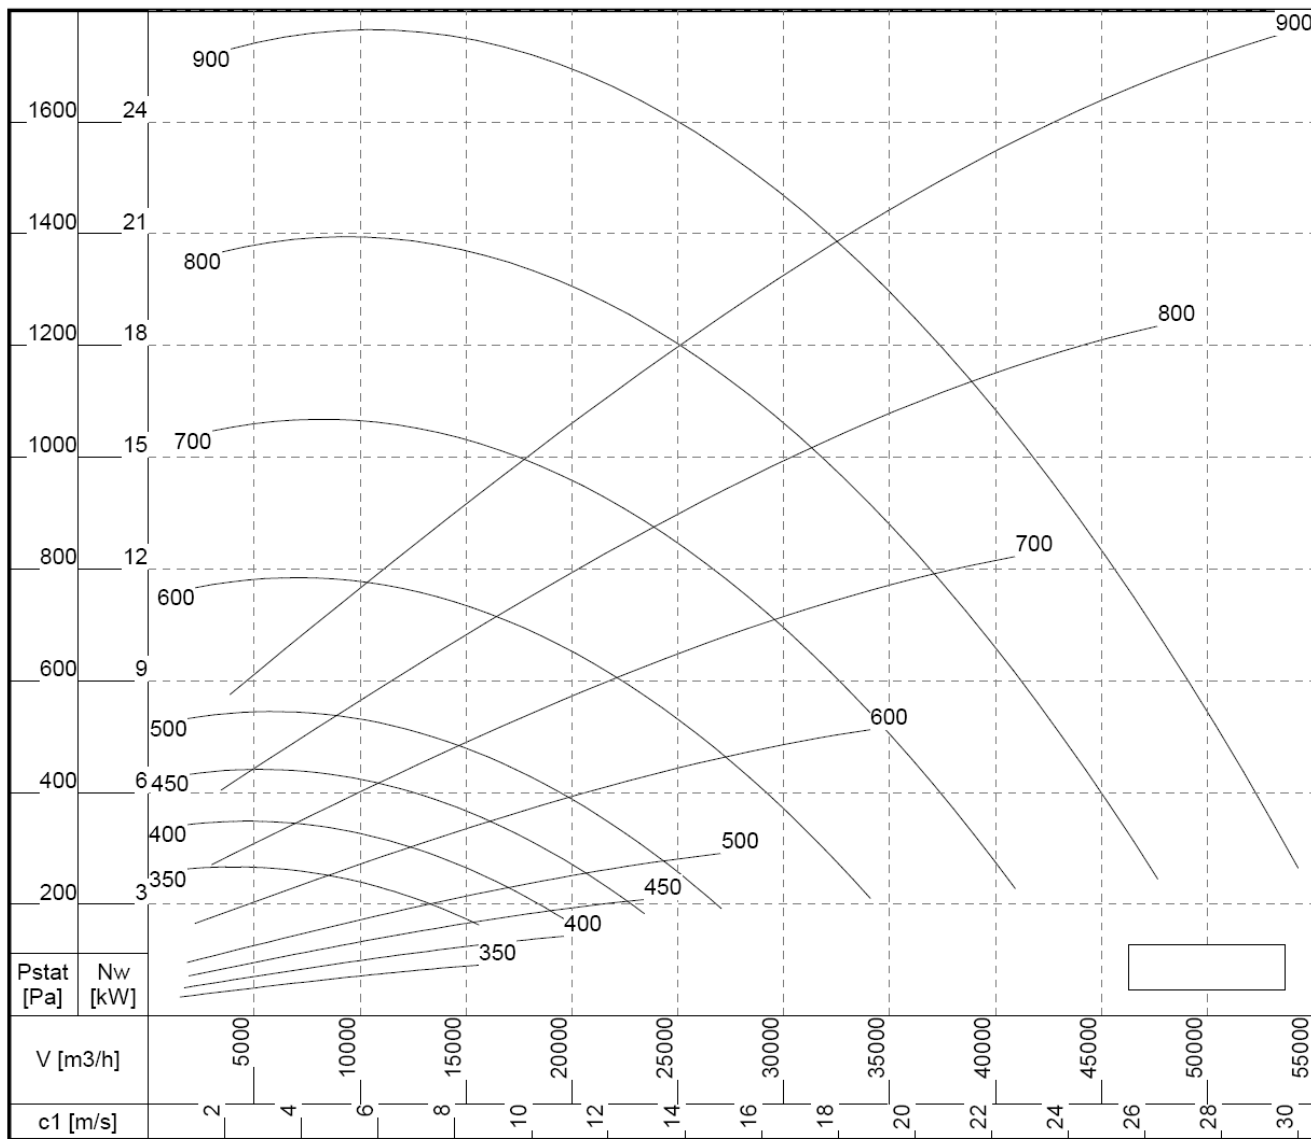

Puissance acoustique  $Lw_A$  dB(A); Niveau de pression acoustique  $Lp_A = Lw_A - 7$  dB(A) Dist. 1m ISO 5136.2

| n      | $Lw_A$<br>dB(A) | Hz |     |     |     |      |      |      |      |
|--------|-----------------|----|-----|-----|-----|------|------|------|------|
| min -1 |                 | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 350    | 71              | 53 | 61  | 65  | 66  | 64   | 57   | 53   | 44   |
| 400    | 74              | 56 | 64  | 68  | 69  | 67   | 60   | 56   | 47   |
| 450    | 77              | 59 | 67  | 71  | 72  | 70   | 63   | 59   | 50   |
| 500    | 79              | 61 | 69  | 73  | 74  | 72   | 65   | 61   | 52   |
| 600    | 83              | 65 | 73  | 77  | 78  | 76   | 69   | 65   | 56   |
| 700    | 86              | 68 | 76  | 80  | 81  | 79   | 72   | 68   | 59   |
| 800    | 89              | 71 | 79  | 83  | 84  | 82   | 75   | 71   | 62   |
| 900    | 92              | 74 | 82  | 86  | 87  | 85   | 78   | 74   | 65   |