


Courbe caractéristique Ventilateur type CMVeco 125



Puissance acoustique L_{wA} dB(A); Niveau de pression acoustique $L_{pA} = L_{wA} + 7$ dB(A) Dist. 1m ISO 5136.2

| n | L_{wA} dB(A) | Hz | | | | | | | |
|--------|-------------------|----|-----|-----|-----|------|------|------|------|
| | | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| min -1 | | | | | | | | | |
| 1600 | 50 | 4 | 20 | 33 | 40 | 46 | 45 | 40 | 29 |
| 1800 | 53 | 7 | 23 | 36 | 43 | 49 | 48 | 43 | 32 |
| 2000 | 55 | 9 | 25 | 38 | 45 | 51 | 50 | 45 | 34 |
| 2200 | 57 | 11 | 27 | 40 | 47 | 53 | 52 | 47 | 36 |
| 2400 | 59 | 13 | 29 | 42 | 49 | 55 | 54 | 49 | 38 |
| 2600 | 61 | 15 | 31 | 44 | 51 | 57 | 56 | 51 | 40 |
| 2800 | 63 | 17 | 33 | 46 | 53 | 59 | 58 | 53 | 42 |
| 3000 | 64 | 18 | 34 | 47 | 54 | 60 | 59 | 54 | 43 |
| 3200 | 65 | 19 | 35 | 48 | 55 | 61 | 60 | 55 | 44 |
| 3400 | 67 | 21 | 37 | 50 | 57 | 63 | 62 | 57 | 46 |
| 3600 | 68 | 22 | 38 | 51 | 58 | 64 | 63 | 58 | 47 |

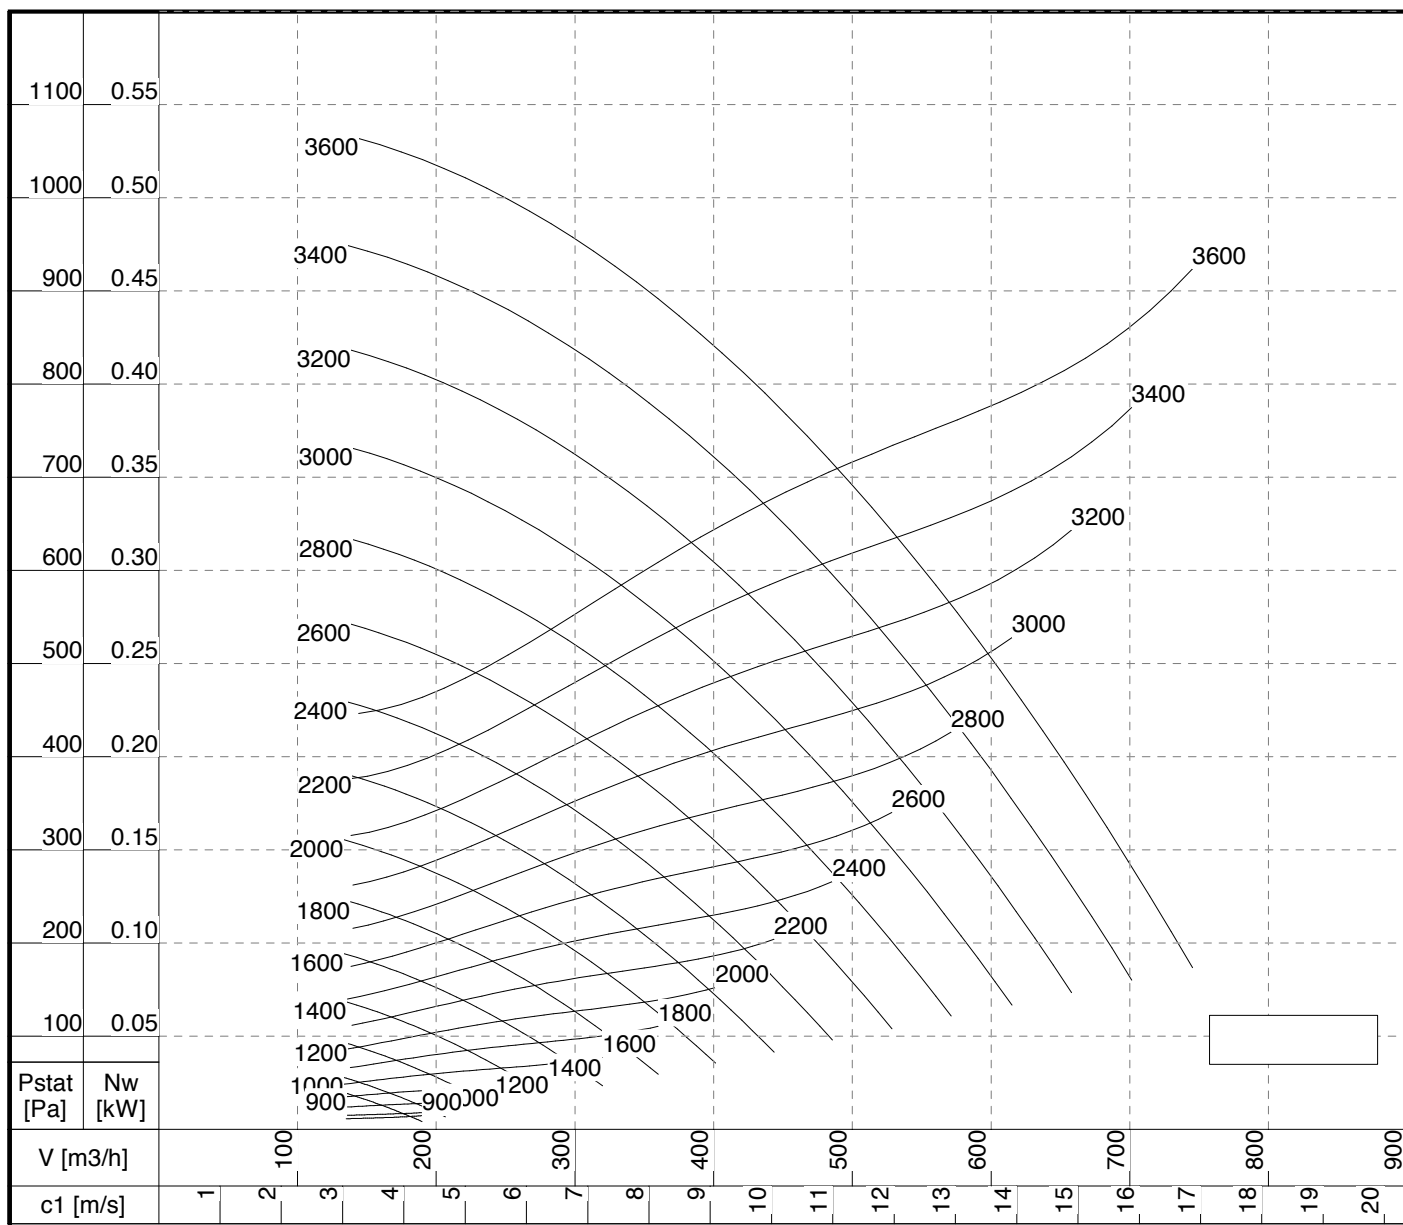